

FORM PTO-1390

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

50255-091

U.S. APPLIC. NO. (if known, see 37 CFR 1.5)

09/014853

INTERNATIONAL APPLICATION NO.

PCT/GB00/00725

INTERNATIONAL FILING DATE

March 1, 2000

PRIORITY DATE CLAIMED

March 4, 1999

TITLE OF INVENTION

NEIGHBOURING CELL LIST GENERATION IN A MOBILE SATELLITE COMMUNICATION SYSTEM

APPLICANT(S) FOR DO/EO/US

Dennis Roy MULLINS and Mark GRAYSON

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau. (A copy of the Published International Application is transmitted herewith)
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendment has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).


Items 11. to 16. below concern other document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.  
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information.
  1. International Search Report prepared by EPO.
  2. International Preliminary Examination Report.



20277

PATENT TRADEMARK OFFICE

U.S. APPLIC. NO. (if known, see 37 CFR 1.50) <b>09/914853</b>		INTERNATIONAL APPLICATION NO. PCT/GB00/00725		ATTORNEY'S DOCKET NUMBER 50255-091	
				<b>CALCULATIONS</b>	PTO USE ONLY
17. <input checked="" type="checkbox"/> The following fees are submitted:  <b>Basic National Fee (37 CFR 1.492(a)(1)-(5)):</b> Search Report has been prepared by the EPO or JPO <span style="float: right;">\$860.00</span>  International preliminary examination fee paid to USPTO (37 CFR 1.482) <span style="float: right;">\$690.00</span> No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) <span style="float: right;">\$710.00</span>  Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO <span style="float: right;">\$1,000.00</span>  International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) <span style="float: right;">\$100.00</span>  <div style="text-align: right;"><b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b></div>				\$ 860.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$ 130.00	
Claims	Number Filed	Number Extra	Rate		
Total Claims	9 -20 =		x \$18.00	\$	
Independent Claims	3 -3 =		x \$80.00	\$	
Multiple dependent claim(s) (if applicable)			+ \$270.00	\$	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$ 990.00	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28).				\$	
<b>SUBTOTAL =</b>				\$ 990.00	
Processing fee of \$130.00 for furnishing the English translation later than the <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
<b>TOTAL NATIONAL FEE =</b>				\$ 990.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$	
<b>TOTAL FEES ENCLOSED =</b>				\$ 990.00	
				Amount to be: refunded	\$
				charged	\$
a. <input type="checkbox"/> A check in the amount of \$ _____ to cover the above fees is enclosed. b. <input checked="" type="checkbox"/> Please charge my Deposit Account No. <u>500417</u> in the amount of \$ <u>990.00</u> to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>500417</u> . A duplicate copy of this sheet is enclosed.					
<b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b>					
SEND ALL CORRESPONDENCE TO:					
McDERMOTT, WILL & EMERY 600 13 <sup>th</sup> Street, N.W. Washington, DC 20005-3096 (202) 756-8000 Facsimile (202) 756-8087			SIGNATURE 		
			David L. Stewart		
			NAME 37,578		
			REGISTRATION NUMBER September 4, 2001		
			DATE		

Docket No.: 50255-091

PATENT

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of :  
:   
Dennis Roy MULLINS, et al. :   
:   
Serial No.: : Group Art Unit:   
:   
Filed: September 04, 2001 : Examiner:   
:   
For: NEIGHBORING CELL LIST GENERATION IN A MOBILE SATELLITE  
COMMUNICATION SYSTEM

**PRELIMINARY AMENDMENT**

Commissioner for Patents  
Washington, DC 20231

Sir:

Prior to examination of the above-referenced application, please amend the application as follows:

**IN THE CLAIMS:**

Please amend Claim 6 as follows:

6. A mobile station for a satellite mobile telephone system, the mobile station comprising transceiver means and control means, wherein the control means is programmed so as to cause the mobile station to operate [according to any proceeding claim] according to claim 1.

The amendment to Claim 6 is attached in Appendix A.

## REMARKS

The above-referenced application is amended to delete the multiple dependency of claim 6 to avoid the multiple dependent claim filing fee.

Respectfully submitted,

MCDERMOTT, WILL & EMERY

*David L. Stewart*  
David L. Stewart

Registration No. 37,578

By: *Robert L. Price*  
*Reg. # 22,685*

600 13<sup>th</sup> Street, N.W.  
Washington, DC 20005-3096  
(202) 756-8000 DLS:ykg  
**Date: November 26, 2001**  
Facsimile: (202) 756-8087

## APPENDIX A

### IN THE CLAIMS:

6. A mobile station for a satellite mobile telephone system, the mobile station comprising transceiver means and control means, wherein the control means is programmed so as to cause the mobile station to operate according to claim 1.

Docket No.: 50255-091

PATENT

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of :  
:   
Dennis Roy MULLINS, et al. :   
:   
Serial No.: : Group Art Unit:   
:   
Filed: September 04, 2001 : Examiner:   
:   
For: NEIGHBORING CELL LIST GENERATION IN A MOBILE SATELLITE  
COMMUNICATION SYSTEM

**PRELIMINARY AMENDMENT**

Commissioner for Patents  
Washington, DC 20231

Sir:

Prior to examination of the above-referenced application, please amend the application as follows:

**IN THE CLAIMS:**

Please amend claims 4 and 5 as follows:

4. (Amended) A method according to claim 1, wherein the neighbouring cell data comprises information identifying a beacon frequency for each cell.
5. (Amended) A method according to claim 1, including:  
comparing said measurements; and  
if the best measurement is not for the currently serving cell, camping on the cell to which the best measurement applies.

REMARKS

The above-referenced application is amended to delete the multiple dependency of claims 4 and 5 to avoid the multiple dependent claim filing fee. Attached hereto is a marked-up version of the changes made to the claims. Entry of this preliminary amendment is respectfully requested.

Respectfully submitted,

MCDERMOTT, WILL & EMERY



David L. Stewart  
Registration No. 37,578

600 13<sup>th</sup> Street, N.W.  
Washington, DC 20005-3096  
(202) 756-8000 DLS:prp  
**Date: September 4, 2001**  
Facsimile: (202) 756-8087

**MARKED-UP VERSION OF AMENDED CLAIMS**

Claims 4 and 5 have been amended as follows:

4. (Amended) A method according to claim 1, [2 or 3,] wherein the neighbouring cell data comprises information identifying a beacon frequency for each cell.
5. (Amended) A method according to [any preceding] claim 1,[ 2 or 3] including:  
comparing said measurements; and  
if the best measurement is not for the currently serving cell, camping on the  
cell to which the best measurement applies.



## NEIGHBOURING CELL LIST GENERATION IN A MOBILE SATELLITE COMMUNICATION SYSTEM

Description

The present invention relates to a method of operating a mobile station in a mobile satellite telephone system and to a method of operating a satellite mobile telephone system.

Various proposals have been made for satellite mobile telephone systems. These include the Inmarsat-M system, the IRIDIUM<sup>TM</sup> system described in EP-A-0365885, the ICO<sup>TM</sup> system described in GB-A-2295296 and the ODYSSEY<sup>TM</sup> system described in EP-A-0510789.

A satellite mobile telephone system, in which the satellites are not in geosynchronous orbits, differs from a terrestrial mobile telephone system in that cells move relative to each other. In the case of the ICO system, described in GB-A-2295296, each satellite produces a plurality of beams, each of which corresponds to one cell of the system. The beams from one satellite do not move relative to each other. Consequently, for each cell, the neighbouring cells served by the same satellite remain the same at all times. Furthermore, the cells served by one satellite will also maintain a constant relationship with those served by another satellite following the same orbit.

However, the ICO and other systems include satellites following a plurality of different orbits. Often the cells served by a satellite in one orbit will overly or be adjacent to cells served by another satellite. Since the satellites are in different orbits, the relationship between the cells served by one satellite and those served by another satellite in another orbit will vary with time.

Each mobile station in the network must be aware of the cells neighbouring the cell in which it is currently located when it is in idle mode. Accordingly, as in the case of GSM systems, for example, data identifying lists of neighbouring cells is transmitted in a broadcast control channel.

According to the present invention, the neighbouring cell data is split into at least two parts in the broadcast control channel. One part is relatively static and includes

cells served by the same satellite. The first part may also include cells served by satellites in the same orbit, if yaw correction is employed to stop the foot prints of the satellites rotating on the earth as the satellite orbits. However, the cells of another satellite in the same orbit could be covered by their own block of

5 neighbouring cell data. The other part changes relatively rapidly and includes cells served by satellites in other orbits. Supplementary data is preferably transmitted to the mobile station informing it when it needs to decode the relatively static neighbouring cell data. The rapidly changing data may be decoded by the mobile station each time it is transmitted or at predetermined intervals. A benefit of the

10 present invention is a reduction in power consumption due a reduction in the processing of neighbouring cell data.

Accordingly, the applicant seeks protection for a method of operating a mobile station in a satellite mobile telephone system, the method comprising the steps of:

15 decoding all of a set of neighbouring cell data transmitted in a broadcast channel to generate a neighbouring cell list; making signal measurements for the cells in said list and the current serving cell; decoding a portion only of the set of neighbouring cell data transmitted in the broadcast channel and modifying the neighbouring cell list in dependence thereon; and making signal measurements for the cells in said list and the

20 current serving cell. The form of the neighbouring cell list is not important to the present invention in its broadest aspect. It is only necessary that the neighbouring cell list be sufficient to enable to mobile station to make signal measurements for neighbouring cells.

25 A "neighbouring cell" is one that is adjacent to, overlaps, is contained within or contains the cell on which the mobile station is currently camped.

Preferably, a method according to the present invention includes the steps of decoding a further portion of said set on reception of a decode instruction in the

30 broadcast channel and modifying the neighbouring cell list in dependence thereon. The further portion preferably relates to the cells served by the same satellite.

Preferably, the neighbouring cell data comprises information identifying a beacon frequency for each cell.

- 5 A method according to the present invention preferably includes comparing said measurements; and if the best measurement is not for the currently serving cell, camping on the cell to which the best measurement applies. The "best" measurement may correspond to the signal with the greatest strength. However, this need not be the case. For instance, a strong signal may be subject to multi-path or co-channel  
10 interference, in which cases a measure of the corruption of the received and decoded data would be a more useful measure.

- The applicant also seeks protection for a mobile station for a satellite mobile telephone system, the mobile station comprising transceiver means and control  
15 means, wherein the control means is programmed so as to cause the mobile station to operate according to a method embodying the present invention.

- The applicant also seeks protection for a method of operating a mobile satellite telephone system comprising the steps of transmitting neighbouring cell data in a  
20 broadcast channel, the neighbouring cell data comprising a first portion relating to cells served by a first satellite in an orbit having a first plane and a second portion relating to cells served by a second satellite in an orbit having a second, different plane; and transmitting neighbouring cell data in the broadcast channel, the second part of the cell data being modified in dependence on the relative motion of the first  
25 and second satellites. Preferably, such a method includes transmitting a decode instruction when data in the first portion of the cell data is modified.

Preferably, the neighbouring cell data comprises information identifying a beacon frequency for each cell.

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

Figure 1 illustrates a satellite mobile telephone system;

Figure 2 shows a mobile station;

5 Figure 3 is a schematic diagram of a satellite access node of the system of Figure 1;

Figure 4 is a data flow diagram for the system of Figure 1;

Figure 5 shows the parts of the TDMA frame structure of the system of Figure 1 that are relevant to the present invention;

10 Figure 6 shows the relative positions of the footprints of two satellites at a first instant;

Figure 7 shows the relative positions of the footprints of the two satellites at a second instant a short time after the first instant; and

Figure 8 is a flow diagram illustrating the operation of a mobile station and the network.

15

Referring to Figure 1, a satellite mobile telephone system comprises a plurality of satellite access nodes 1a, 1b, 1c interconnected by a high capacity digital network 2 (hereinafter "the backbone network"), a plurality of satellites 3a, 3b, a plurality of a mobile stations 4a, 4b, gateway mobile satellite switching centres 5a, 5b, 5c providing  
20 connections between the satellite access nodes 1a, 1b, 1c and other networks 6, a network management centre 7, a satellite control centre 8 and a tracking, telemetry and control station 9. The network management centre 7, the satellite control centre 8 and the tracking, telemetry and control station 9 are interconnected by a lower capacity digital network 10 which is also connected to the backbone network 2. The  
25 other networks 6 comprise the public switched telephone network (PSTN), cellular telephone networks and the like.

The satellite control centre 8 and the tracking, telemetry and control station 9 control the operation of the satellites 3a, 3b, for instance setting transmit power levels and  
30 transponder input tuning, as directed by the network management centre 7.

Telemetry signals from the satellites 3a, 3b are received by the tracking, telemetry and

control station 9 and processed by the satellite control centre 8 to ensure that the satellites 3a, 3b are functioning correctly.

The satellites 3a, 3b repeatedly broadcast control information in broadcast control channels (BCCH). A mobile station 4a repeatedly receives and decodes the information in the BCCH broadcast by the satellite 3a, 3b currently serving it.

During a telephone call, a mobile station 4a, 4b communicates with a satellite 3a, 3b via a half duplex channel comprising a downlink channel and an uplink channel. The channels comprise TDMA time slots on frequencies allocated on initiation of the call or re-allocated during a call.

The satellites 3a, 3b are in non-geostationary orbits and comprise generally conventional satellites, such as the known Hughes HS601 model, and may include features as disclosed in GB-A-2288913. Each satellite 3a, 3b is arranged to generate an array of beams covering a footprint beneath the satellite, each beam including a number of different frequency channels and time slots.

Referring to Figure 2, a mobile station 4 is generally similar to the units presently available for GSM networks and comprises a codec, a controller 16, a microphone 10, a loudspeaker 11, a battery 12, a keypad 13, a radio frequency interface, an antenna 14, a display 15 and subscriber identification module (SIM) smart card.

The codec comprises a low bit-rate coder, which generates a speech bit stream at 3.6 kbits/s, together with a channel coder, which applies error correction codes to the speech bit stream to produce an encoded bit stream at 4.8 kbits/s. The low bit-rate coder is a linear predictive coder. The channel coder uses Viterbi coding. The codec also comprises complementary decoders.

The SIM includes a processor and a non-volatile memory which stores data identifying the subscriber and data for use in encrypted communication.

Referring to Figure 3, a satellite access node 1 comprises a dish antenna 20 mounted for tracking satellites, transmitter and receiver circuits 21 including amplifiers, multiplexers, demultiplexers and codecs, a visited mobile satellite switching centre 22 including a controller 23, a visitor location register 25 and a voice mail box unit 24. The mobile satellite switching centre 22 is coupled for communications signals to the backbone network 2, to a gateway and to the transmitter and receiver circuits 21. The controller 23 is coupled for data signals to the visitor location register 25 and the voice mail box unit 24 and may also send and receive data signals via the backbone network 2.

The controller 23 responds to addresses on incoming communications signals, from the antenna 20, the gateway and the backbone network 2, by controlling the mobile satellite switching centre 22 to output the communications signals on the appropriate paths to their destinations, i.e. the antenna 20, the gateway or the backbone network 2.

The visitor location register 25 maintains a record of each of the subscribers registered with the satellite access node 1. The voice mail box unit 25 provides storage space for voice mail messages for subscribers.

Referring to Figure 4, a database 30, called the home location register, contains records relating to each mobile station 4a, 4b. The record contains the mobile station's identity (International Mobile Subscriber Identity or IMSI) and the current address of the visitor location register 25a, 25b where the mobile station 4a, 4b is registered. The visitor location register 25a, 25b contains a part copy of the home location register information (e.g. which services are subscribed to), the status of the mobile station (whether it is "local" or "global") the geographical position of the mobile station, the address of home location register where the mobile station is a subscriber (to enable billing and other data to be collected at a single point), the currently active satellite access node with which the mobile station is in

communication via a satellite, an individual enciphering key and the address of an associated voice mail box unit location.

The home location register 30 may be located in the network management centre 7 (see Figure 1) or may be distributed among the satellite access nodes 1a, 1b, 1c (see Figure 1) or may be in another network, e.g. when a GSM subscriber roams onto the satellite network.

Referring to Figures 1 to 4, a mobile station 4a may be registered with one of two distinct statuses; "local" in which the mobile station 4a is permitted to communicate only through one local area or part of the satellite system network, and "global", which entitles the mobile station 4a to communicate through any part of the satellite mobile telephone system.

The mobile station 4a performs an automatic registration process (location update), of the kind well known in the art of cellular terrestrial communications, on each occasion when the mobile station 4a is used for an outgoing call, when the mobile station 4a is switched on, periodically whilst the mobile station 4a is operating and when the mobile station 4a has been unpageable for a predetermined period. As is conventional, the location update takes the form of transmitting of a signal identifying the mobile station 4a (e.g. by transmitting its telephone number on a random access channel). The mobile station 4 decides to camp on a particular cell on the basis of measurements of signals on beacon frequencies and the random access channel used is the one associated with the cell on which the mobile station 4 decides to camp.

The transmitted signal is picked up by one of the satellites 3a. From the received random access channel signal, the satellite access node 1a serving the satellite 3a which sets up a dedicated channel for the mobile station 4a. From the random access channel signal, the satellite access node 1a derives the propagation path time and doppler shift and communicates this to the mobile station 4a in an immediate

assignment message. The propagation time is actually send as the difference between actual propagation time and a reference propagation time.

The first message sent on the assigned channel by the mobile station 4a is the "initial message" and when this is received the satellite access node 1a, calculation of the mobile station's position using the propagation time and doppler data is triggered. The position of the mobile station 4a is added to the "initial message" which is then passed on to the visitor location register 25a where the mobile station 4a is registered.

At this stage, the visitor location register 25a can be used to confirm that the mobile station 4a has a subscription for service in the area for which it is located or conversely when first registering with the visitor location register 25a to use information provided in the initial message to derive the address of the home location register and to contact the home location register during which a part copy of the home location register information will be transferred to the visitor location register 25a and the data in the home location register which points to the visitor location register 25a is updated. The location of the mobile station 4a is thus stored in the database of the visitor location register 25a.

As the mobile station 4a and the cells move relative to one another, the visitor location register 25a may determine that the mobile station 4a should be handled via another satellite access node 1b. Consequently, the visitor location register record of the mobile station 4a is amended.

When a mobile terminated call is made to the mobile station 4a, it is directed to the visited mobile satellite switching centre 22a at which the mobile station 4a is registered. The visited mobile satellite switching centre 22a causes a paging signal to be sent to the cells where the called mobile station 4a is expected to be, i.e. via the satellites 3a, 3b serving cells covering the mobile station's location. These cells where the mobile station 4a is expected to be are determined from the mobile station's location, stored in the visitor location register 25a, and knowledge of the movement



of cells across the surface of the earth. When the mobile station 4a receives the paging signal, it enters into a dialogue with the network to obtain a channel for the call. If the mobile station 4a does not respond to the paging signal, the network will inform the calling party that the mobile station 4a cannot be reached.

5

When a mobile originating call is to be made, the user of the mobile station 4a enters the number to be dialled and presses a "send" key. The mobile station 4a responds by sending an access request using a random access channel on a dedicated frequency, corresponding to a cell, to the network via one visible satellite 3a, 3b. The satellite  
10 access node 1a responds on the basis of the cell from which it receives the access request. The selected satellite access node 1a sends a immediate assignment message using a access grant channel. The immediate assignment message includes the physical parameters of a stand-alone dedicated control channel assigned by the network. The radio link setup is completed using the stand-alone dedicated control  
15 channel and then the connection of the call is attempted. On connection of the call, the mobile station 4a is allocated a traffic channel that is then used for the call.

Referring to Figure 5, each TDMA frame 100 transmitted to a cell comprises six time slots. Each time slot of a frame may be occupied by a traffic channel 101, a broadcast  
20 control channel slot 102 or an alert channel slot 103a, 103b. When no alert message is being transmitted, no power is radiated during the alert channel slot 103b.

Referring to Figure 6, the first satellite 3a (Figure 1) serves first to seventh cells 301, 302, 303, 304, 305, 306, 307 and the second satellite 3b (Figure 1) serves eighth to  
25 fourteenth cells 401, 402, 403, 404, 405, 406, 407. The first cell 301 is surrounded by the second to seventh cells 302, ... , 307 and the eighth cell 401 is surrounded by the ninth to fourteenth cells 402, ... , 407. The eighth to fourteenth cells 401, ... , 407 overlap with the first to seventh cells 301, ... , 307. The ground track of the first satellite 3a is indicated by arrow A and the ground track of the second satellite 3b is  
30 indicated by arrow B. A mobile station 4 is located in the first cell 301 towards its

leading side. It can be seen that the neighbouring cells of the first cell are the second to seventh cells 302, ... , 307 and the eighth to eleventh cells 401, ... , 404.

Referring to Figure 7, a short time later, the footprints of both satellites 3a, 3b have moved across the earth's surface. Assuming for the sake of this explanation that the mobile station 4 has not moved relative to the earth's surface, it can be seen that the mobile station is more centrally located in the first cell 301 and that the neighbouring cells of the first cell are now the second to seventh cells 302, ... , 307, as before, and the eighth to fourteenth cells 401, ... , 407 which virtually match the positions of the first to seventh cells 301, ... , 307.

Referring to Figure 8, considering now the situation where the mobile station 4 is switched on when positioned as shown in Figure 6, the mobile station 4 initially scans all broadcast control channel frequencies (step s1) and determines which has the best signal (in the present example this will be assumed to be the first cell 301) (step s2). It then transmits a location update signal in a random access channel of the first cell 301 (step s3).

The mobile station 4 decodes the all of the control information in the broadcast control channel of the first cell 301 including the whole of the neighbouring cell data (step s4). The neighbouring cell data is transmitted by the network (step s101) in the broadcast control channel in two discrete blocks, a first one relating to the neighbouring cells served by the first satellite 3a and a second one relating to the neighbouring cells served by the second satellite 3b. Once the broadcast control channel information has been decoded, the mobile station 4 ceases to decode the first block of neighbouring cell data transmitted in the broadcast control channel.

However, the mobile station 4 will monitor the alert channel (step s5). Under unchanging circumstances, no power is radiated in the alert channel slots by the network and consequently, the mobile station's controller does not need to process any information.

The mobile station 4 periodically decodes the second neighbouring cell data block (step s6) and measures the beacon frequencies identified by its neighbouring cell list and the beacon frequency of the cell 301, on which it is camped, to determine whether it should camp on another cell (step s7).

5

When the footprints of the satellites 3a, 3b move into the relation shown in Figure 7, the neighbouring cell data relating to cells served by the first satellite 3a remains valid but the neighbouring cell data relating to the cells served by the second satellite 3b is no longer valid. Consequently, the network modifies the transmitted neighbouring cell data in the second neighbouring cell data block (step s101) and this is decoded by the mobile station 4 (step s6). At this time, the first neighbouring cell data block is not decoded.

10

Under normal circumstances, the mobile station 4 will only need to decode the first neighbouring cell data block once when it first camps on a cell. However, the beacon frequencies of one or more of the cells (301, ... , 307) covered by the first neighbouring cell data block may change, for instance because the cells are moving into an area with different spectrum allocation regulations. In this situation, an alert message is transmitted (step s102). The mobile station 4 receives the alert information (step s5) which is decoded by the mobile station's controller (step s8). The controller determines that there has been or will be a change in the first neighbouring cell data block in the control information and controls the mobile station 4 to start to decode those broadcast control channel bursts containing the first neighbouring cell data block (step s9). The controller then updates the neighbouring cell list (step s10) and uses the modified list to control subsequent measurements of beacon signals (step s7). The mobile station 4 continues to repeatedly check for an alert message and decode the second neighbouring cell data block.

15

20

25

When the mobile station 4 determines that it should camp on another cell, it will know the broadcast control channel frequency for the new cell because it will have been provided in the neighbouring cell data. As mentioned above, the mobile station

30

4 initially decodes all of the neighbouring cell data from the new broadcast control channel and then operates as described above; monitoring the alert channel and then only decoding the first neighbouring cell data block when a change therein is indicated by a signal in the alert channel.

5

In the foregoing description, each satellite serves seven cells. This is fewer than would be likely in practice. However, the small number of cells has been used in order that the present invention may be more easily understood.

- 10 In another embodiment, the neighbouring cell data is divided into three blocks. A first block is substantially static and relates to cells served by the a first satellite. A second block changes relatively slowly and relates to cells served by a second satellite in the same orbital plane as the first satellite. A third block changes relatively rapidly and relates to cells served by a third satellite in an obital plane different to that of the
- 15 first satellite.

- When a mobile station 4 first camps on a cell, it decodes all of the neighbouring cell data in the broadcast control channel. Thereafter, it repeatedly decodes the third block and only decodes the first and second block on receipt of characteristic alert
- 20 messages.

- The foregoing description uses terminology familiar to the skilled person from descriptions of GSM systems in order to make the present invention more readily comprehensible. However, the present invention is not limited to systems similar to
- 25 GSM systems.

## Claims

1. A method of operating a mobile station in a satellite mobile telephone system, the method comprising the steps of:

5 decoding all of a set of neighbouring cell data transmitted in a broadcast channel to generate a neighbouring cell list;

making signal measurements for the cells in said list and the current serving cell;

10 decoding a portion only of the set of neighbouring cell data transmitted in the broadcast channel and modifying the neighbouring cell list in dependence thereon; and

making signal measurements for the cells in said list and the current serving cell.

15 2. A method according to claim 1, including the steps of decoding a further portion of said set on reception of a decode instruction in the broadcast channel and modifying the neighbouring cell list in dependence thereon.

20 3. A method according to claim 2, wherein the data in said portion changes more rapidly than the data in said further portion.

4. A method according to claim 1, 2 or 3, wherein the neighbouring cell data comprises information identifying a beacon frequency for each cell.

25 5. A method according to any preceding claim 1, 2 or 3, including:  
comparing said measurements; and  
if the best measurement is not for the currently serving cell, camping on the cell to which the best measurement applies.

30 6. A mobile station for a satellite mobile telephone system, the mobile station comprising transceiver means and control means, wherein the control means is

programmed so as to cause the mobile station to operate according to any preceding claim.

7. A method of operating a mobile satellite telephone system comprising the  
5 steps of:

transmitting neighbouring cell data in a broadcast channel, the neighbouring  
cell data comprising a first portion relating to cells served by a first satellite in an  
orbit having a first plane and a second portion relating to cells served by a second  
satellite in an orbit having a second, different plane; and

10 transmitting neighbouring cell data in the broadcast channel, the second part  
of the cell data being modified in dependence on the relative motion of the first and  
second satellites.

8. A method according to claim 7, wherein the neighbouring cell data comprises  
15 information identifying a beacon frequency for each cell.

9. A method according to claim 8, including transmitting a decode instruction  
when data in the first portion of the cell data is modified.

0004453-11601  
"PCT/GB00/00725"

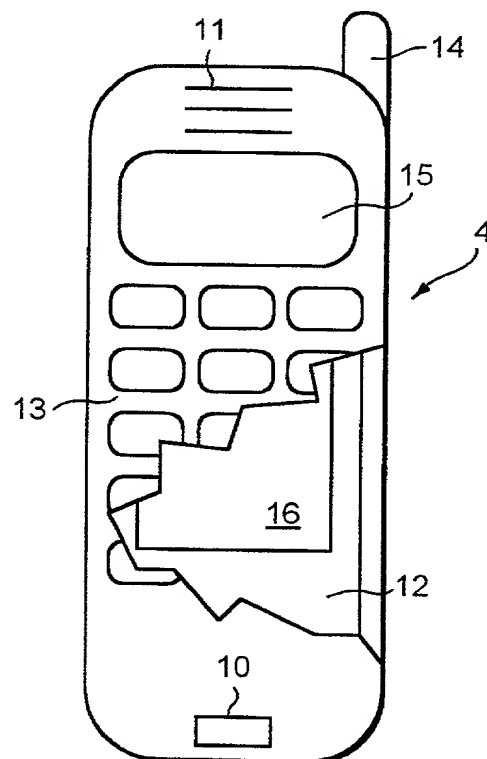
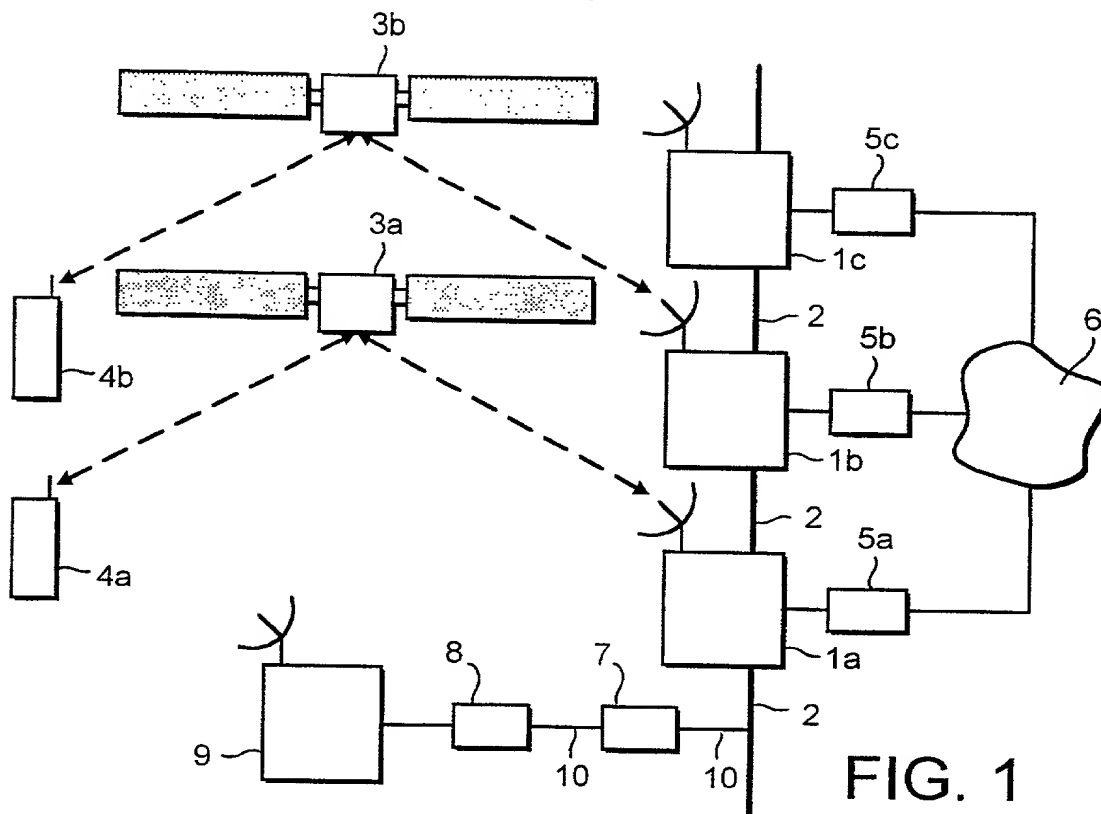


FIG. 2

[illegible]

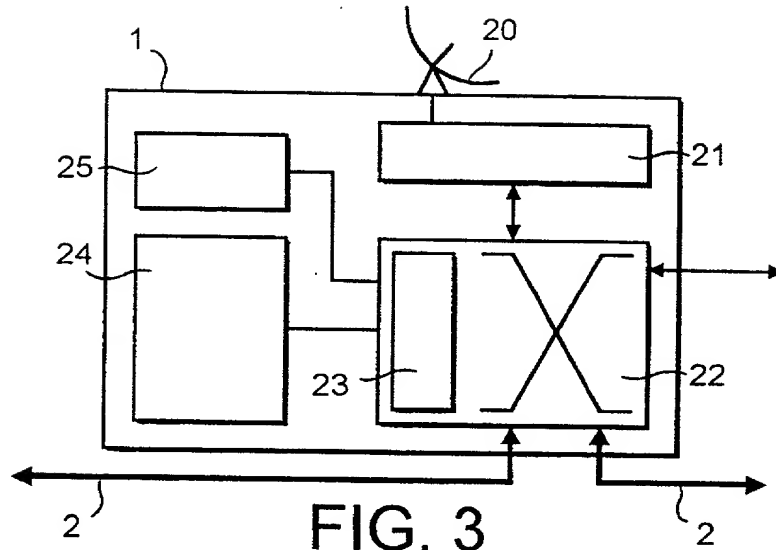


FIG. 3

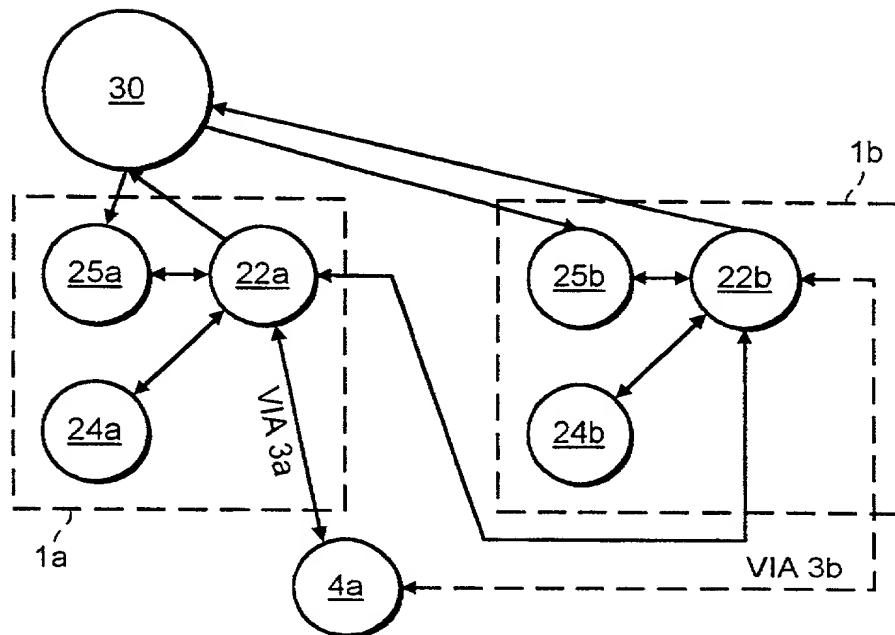
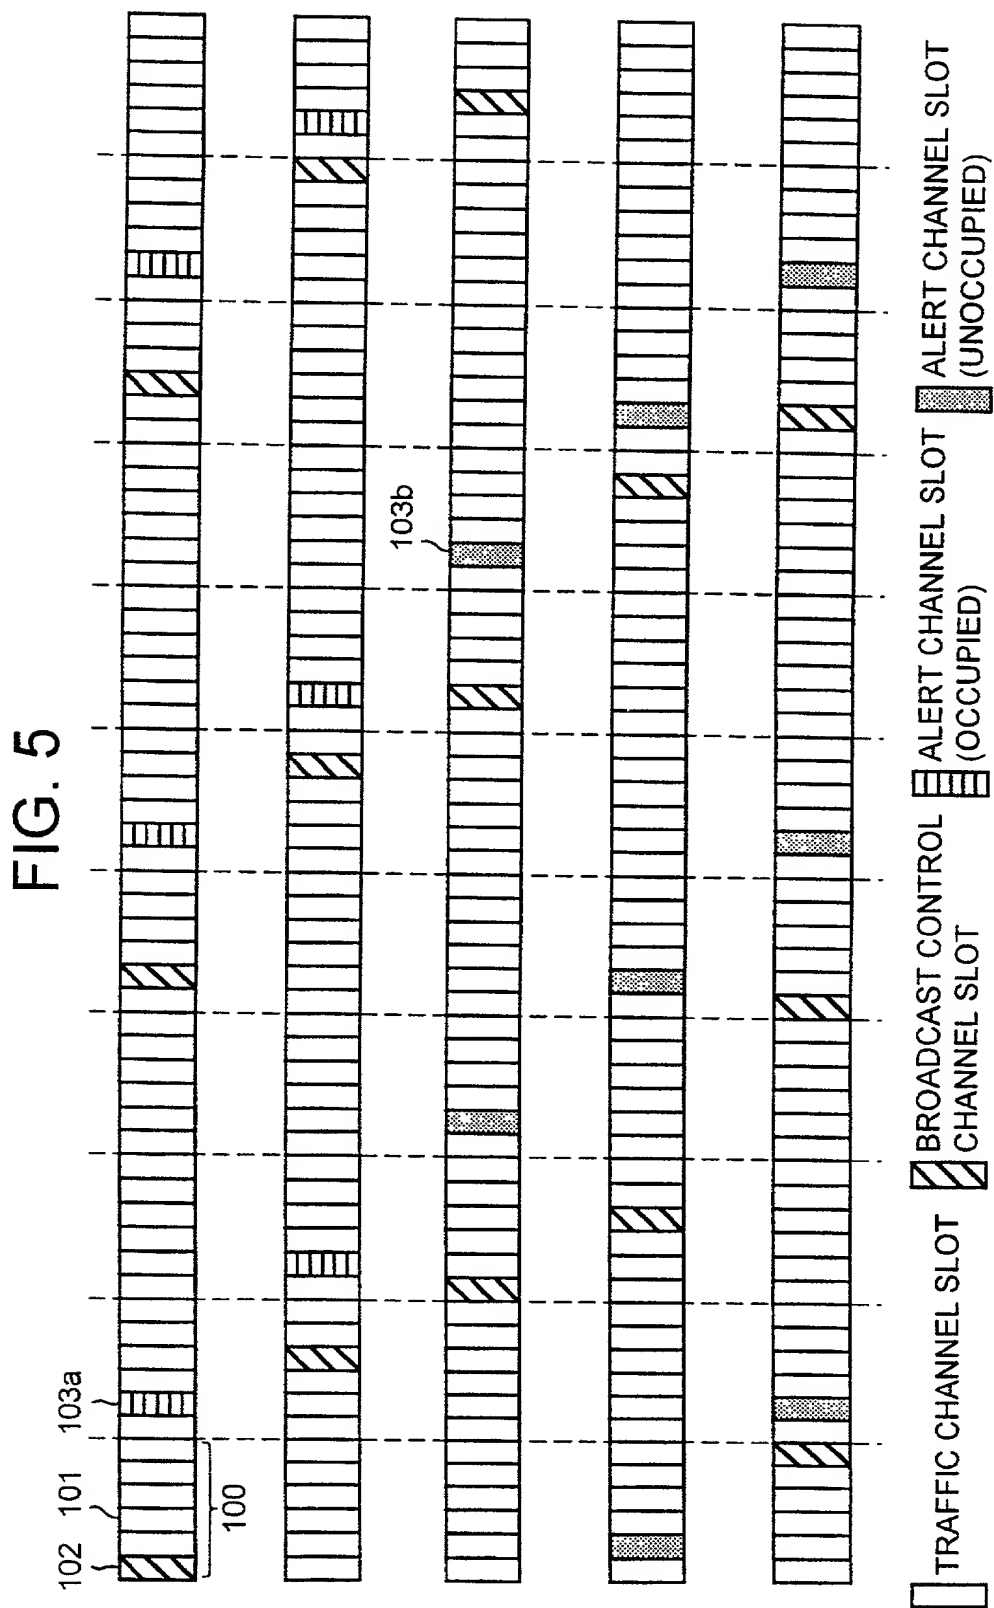
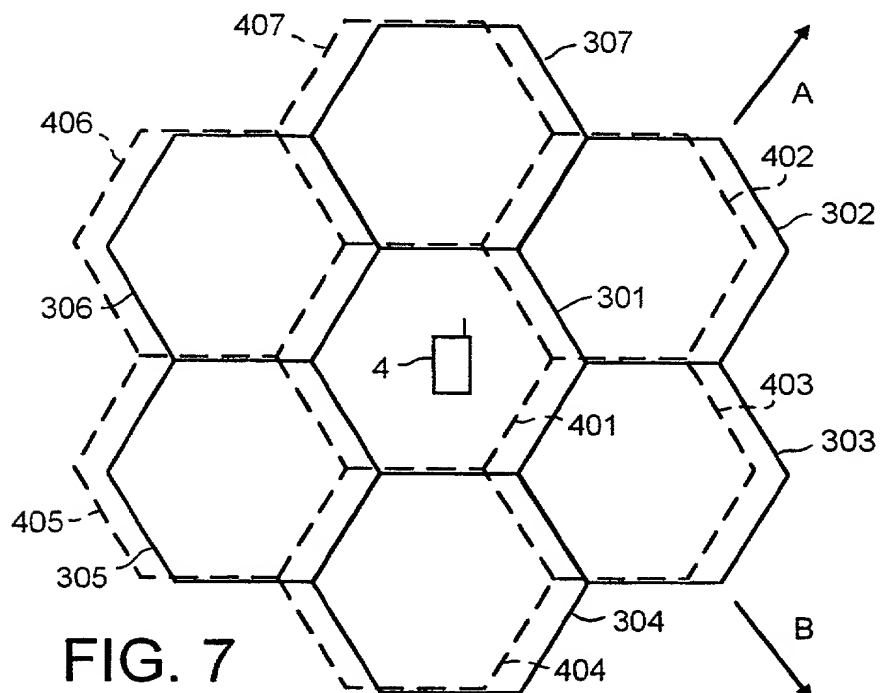
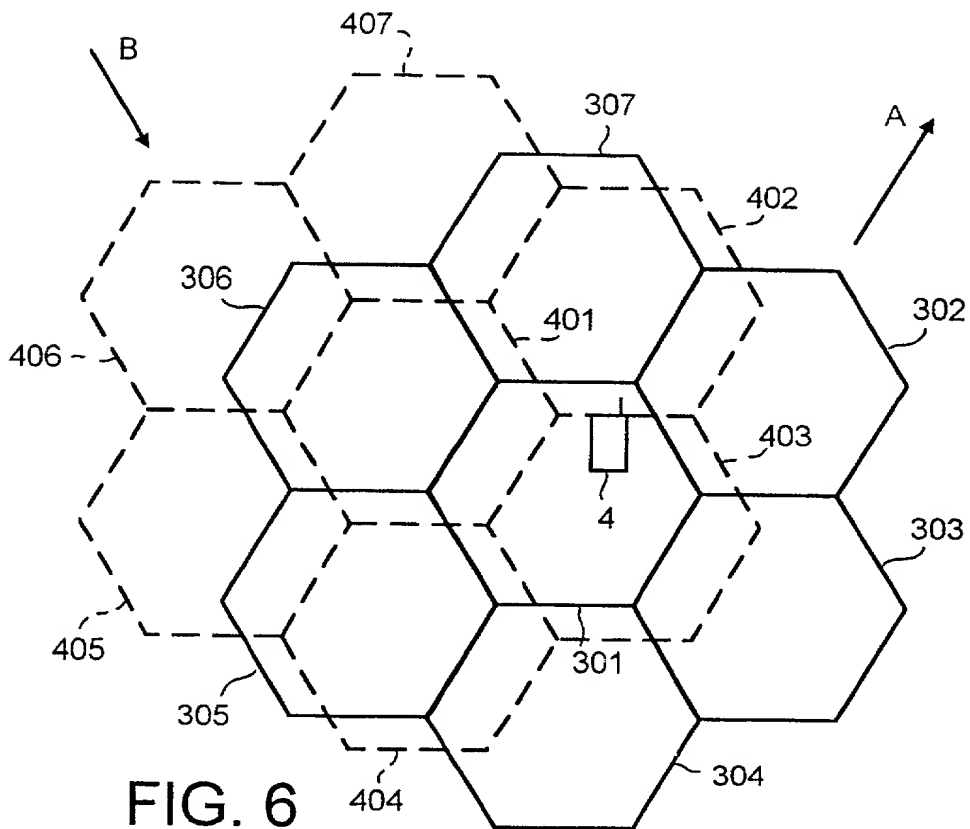


FIG. 4







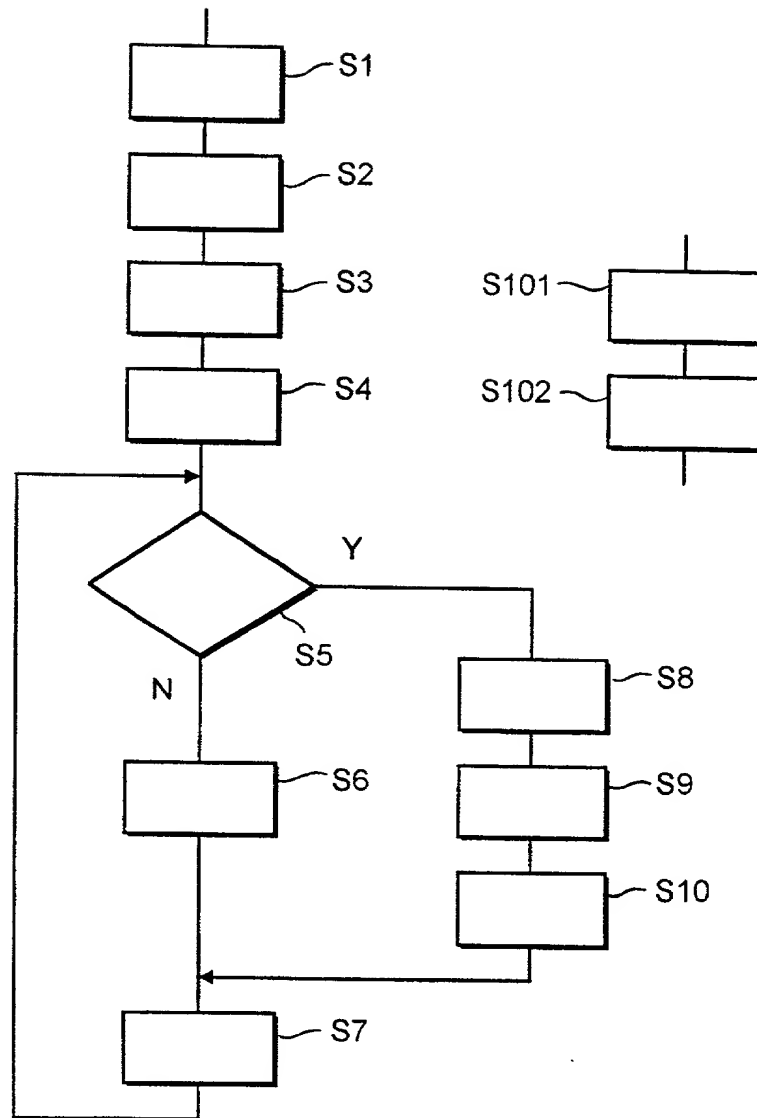


FIG. 8

094453-4260  
T0321-EST-1650

**COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY**

Attorney's Docket Number

(Includes Reference to PCT International Application(s))

As below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Telephones with full operation in a mobile x-axis communication system

The specification of which:

☐ is attached hereto.

☐ was filed as United States application Serial No. \_\_\_\_\_

on \_\_\_\_\_

and was extended on \_\_\_\_\_ (if applicable)

☒ was filed as PCT International application Number PCT/GB99/00774

on 1<sup>st</sup> March 2000

and was extended under PCT Article 18 on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known to me to be material to patentability in accordance with Title 37, Code of Federal Regulations §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(e)-(f) or Section 265(b) of any foreign and/or international application(s) for patent or inventor's certificate or Section 265(a) of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

**FROM FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:**

COUNTRY (If PCT, indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
EPC	99301632.6	4 March 1999	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

I hereby claim the benefit under 35 USC §119(a) of any United States provisional application(s) listed below.

**PRIOR PROVISIONAL APPLICATION(S):**

Application Number	Filing Date

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s), or §365(c) of any PCT international application(s) designating the United States of America that were filed below and, insofar as the subject matter of each of the claims of this application is not disclosed in such prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge a duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application.

**PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:**

U.S. APPLICATIONS		STATUS (Check One)		
U.S. Application Number	U.S. Filing Date	Patented	Pending	Abandoned
PCT APPLICATIONS DESIGNATING THE U.S.				
PCT Application No.	PCT Filing Date	U.S. Serial Numbers Assigned (if any)		

**POWER OF ATTORNEY:** As named inventor, I hereby authorize the following attorneys and/or agents to prosecute this application and conduct all business in the Patent and Trademark Office connected therewith: Savvas A. Alaman, Reg. No. 28,562; Edward A. Backer, Reg. No. 37,717; Stephen A. Backer, Reg. No. 38,547; William H. Deane, Reg. No. 38,548; John C. Deane, Reg. No. 37,855; Kenneth L. Deane, Reg. No. 28,151; Stephen C. Deane, Reg. No. 38,549; Paul Devinsky, Reg. No. 28,551; Laura A. Donnelly, Reg. No. 38,435; Margaret M. Dunham, Reg. No. 30,879; Brian E. Ferguson, Reg. No. 38,801; Michael P. Fennerty, Reg. No. 38,138; Wilhelm F. Gadano, Reg. No. 37,136; Kevin E. George, Reg. No. 34,111; John A. Hankins, Reg. No. 32,029; Thomas A. Jolly, Reg. No. 38,241; Eric J. Krane, Reg. No. 38,189; Robert S. Macdonald, Reg. No. 38,880; Robert E. LeBlanc, Reg. No. 37,518; Jack C. Leach, Reg. No. 29,152; Raphael V. Lupo, Reg. No. 28,363; Christine F. Martin, Reg. No. 38,792; Michael E. McCabe, Jr., Reg. No. 37,182; James H. Meadows, Reg. No. 38,563; Michael A. Sassano, Reg. No. 38,222; Joseph H. Vassili, Jr., Reg. No. 31,667; Craig L. Plazek, Reg. No. 31,258; Robert L. Price, Reg. No. 22,585; Paul A. Roberts, Reg. No. 40,289; Gene Z. Robinson, Reg. No. 33,351; Joy Ann E. Sarantides, Reg. No. 37,888; Michael D. Schmitt, Reg. No. 24,717; David J. Scott, Reg. No. 30,589; Glenn Snyder, Reg. No. 41,428; Arthur J. Steiner, Reg. No. 28,108; David L. Stewart, Reg. No. 37,578; Leopold D. Thohm, Reg. No. 38,382; Kevin J. Townsend, Reg. No. 40,020; Leon R. Tschene, Reg. No. 34,068; Christopher C. Ward, Reg. No. 31,327; Lillian G. Wasserman, Reg. No. 38,743; Edward J. Wise, Reg. No. 34,323; Alexander V. Yemboch, Reg. No. 38,324; and Robert W. Zeinick, Reg. No. 35,878, all of McDermott, Will & Emery.

Send Correspondence to: <b>McDERMOTT, WILL &amp; EMERY</b> 600 13th Street, N.W. Washington, DC 20005-3085	Direct Telephone Calls to: (Name and telephone number) (703) 754-8000
---	---

201	Full Name of Inventor	Family Name Mullins	First Given Name Dennis	Second Given Name Hoy
	Residence and Citizenship	City London GBX	State or Foreign Country UK	Country of Citizenship United Kingdom
	Post Office Address	Post Office Address 23 Kennington Palace Court Surrey Street	City London W8 8BN SE11 5UL	State & Zip Code/Country United Kingdom
202	Full Name of Inventor	Family Name Grayson	First Given Name Mark	Second Given Name
	Residence and Citizenship	City London GBX	State or Foreign Country UK	Country of Citizenship United Kingdom
	Post Office Address	Post Office Address 71 Patton Road Chislewick	City London W4 2QT	State & Zip Code/Country United Kingdom

FOIA b 7 - EXEMPT

2-0


203	Full Name of Inventor	Family Name	First Given Name	Second Given Name
	Residence and Citizenship	City	State or Foreign Country	Country of Citizenship
	Post Office Address	Post Office Address	City	State, Zip Code/Country

I hereby declare that all statements made herein are my own independent and true and that all statements made are information and belief and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the subject application or any patent issuing thereon.

Signature of Inventor 203: <u>Deann Hull</u>	Signature of Inventor 203: <u>M. G. G. G. G.</u>	Signature of Inventor 203:
Date <u>15th Oct 2006</u>	Date <u>22 Nov 01</u>	Date

09014359 112501

United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division

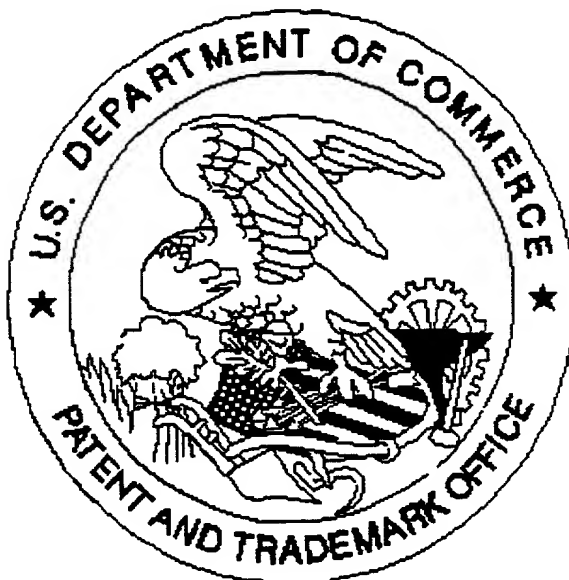

Application deficiencies found during scanning:

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☒ Scanned copy is best available. The original Declaration  
sheet are not clear.